

2/3/4 Megapixel H.265 Remote Focus&Zoom Mini Bullet Network Camera





MS-C2963-F(I)PB/MS-C3763-F(I)PB/MS-C4463-F(I)PB



KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Integrated Motorized Varifocal Lens(Auto Focus)
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 25m
- Weather-proof IP67-rated Housing
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

DIMENSIONS (mm)

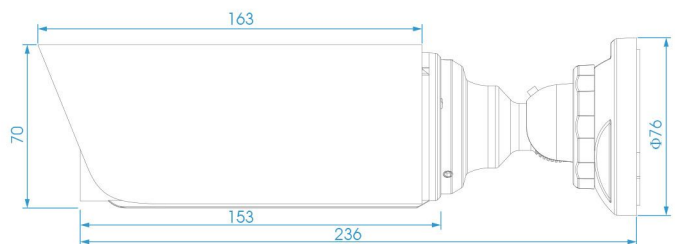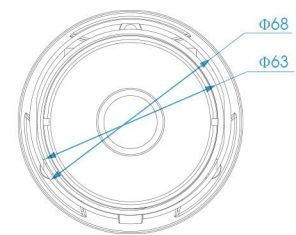

SUPPORTED BROWSERS



Firefox



IE



Chrome



Safari



	Model	MS-C2963-F(I)PB (2.0MP)	MS-C3763-F(I)PB (3.0MP)	MS-C4463-F(I)PB (4.0MP)
Camera	Image Sensor	1/2.8" Progressive Scan CMOS		1/3" Progressive Scan CMOS
	Min. Illumination	Color: 0.002Lux @F1.2 B/W: 0Lux with IR on	Color: 0.005Lux@F1.2 B/W: 0Lux with IR on	Color: 0.008Lux @F1.2 B/W: 0Lux with IR on
	WDR	Super WDR up to 140dB	Super WDR up to 120dB	
	Lens	Motorized 2.8~12mm/7~22mm @F1.4 P-Iris(Optional)		
	Mount	Φ14		
	Field of View	H90°~H31°(2.8~12mm)	H86°~H31°(2.8~12mm)	H78.4°~H26.2°(2.8~12mm)
	Shutter Time	1/100000s~1/5s		
	IR Distance	Up to 25m		
	Day&Night	ICR Filter Auto Switch		
Video	Max Image Resolution	1920×1080	2048x1536	2592×1520
	Frame Rate	30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	30fps(2048x1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)
	Video Compression	H.265(HEVC)/H.264/MJPEG		
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)		
	Image Setting	Brightness/Contrast/Saturation/Sharpness		
	Network	Ethernet	1*RJ45 10M/100M Ethernet Port	
Network Storage		NAS(Support NFS, SMB/CIFS)		
Protocol		TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
System	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, etc.		
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone		
	System Compatibility	ONVIF Profile S		
General	Working Temperature	-30℃~60℃		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE/ DC12V±10%		
	Power Consumption	5.5W MAX	6W MAX	4.5W MAX
		9.5W MAX (With IR on)	9.5W MAX (With IR on)	7W MAX (With IR on)
	Weather Proof	Up to IP67 Rating for Weather-resistant Performance		
	Weight	820g		
	Dimensions	Φ76mmX236mm		
Warranty	2 Years			

Note: MS-C2963-F(I)PB, F refers to Motorized Lens, I refers to P-Iris, P refers to PoE, B refers to H.265

V6.10

