



Preview Server

Version 9.2.0

Ex Libris Confidential

CONFIDENTIAL INFORMATION

The information herein is the property of Ex Libris Ltd. or its affiliates and any misuse or abuse will result in economic loss. DO NOT COPY UNLESS YOU HAVE BEEN GIVEN SPECIFIC WRITTEN AUTHORIZATION FROM EX LIBRIS LTD.

This document is provided for limited and restricted purposes in accordance with a binding contract with Ex Libris Ltd. or an affiliate. The information herein includes trade secrets and is confidential.

DISCLAIMER

The information in this document will be subject to periodic change and updating. Please confirm that you have the most current documentation. There are no warranties of any kind, express or implied, provided in this documentation, other than those expressly agreed upon in the applicable Ex Libris contract. This information is provided AS IS. Unless otherwise agreed, Ex Libris shall not be liable for any damages for use of this document, including, without limitation, consequential, punitive, indirect or direct damages.

Any references in this document to third-party material (including third-party Web sites) are provided for convenience only and do not in any manner serve as an endorsement of that third-party material or those Web sites. The third-party materials are not part of the materials for this Ex Libris product and Ex Libris has no liability for such materials.

TRADEMARKS

"Ex Libris," the Ex Libris Bridge to Knowledge , Primo, Aleph, Voyager, SFX, MetaLib, Verde, DigiTool, Rosetta, bX, URM, Alma , and other marks are trademarks or registered trademarks of Ex Libris Ltd. or its affiliates.

The absence of a name or logo in this list does not constitute a waiver of any and all intellectual property rights that Ex Libris Ltd. or its affiliates have established in any of its products, features, or service names or logos.

Trademarks of various third-party products, which may include the following, are referenced in this documentation. Ex Libris does not claim any rights in these trademarks. Use of these marks does not imply endorsement by Ex Libris of these third-party products, or endorsement by these third parties of Ex Libris products.

Oracle is a registered trademark of Oracle Corporation.

UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Ltd.

Microsoft, the Microsoft logo, MS, MS-DOS, Microsoft PowerPoint, Visual Basic, Visual C++, Win32, Microsoft Windows, the Windows logo, Microsoft Notepad, Microsoft Windows Explorer, Microsoft Internet Explorer, and Windows NT are registered trademarks and ActiveX is a trademark of the Microsoft Corporation in the United States and/or other countries.

Unicode and the Unicode logo are registered trademarks of Unicode, Inc.

Google is a registered trademark of Google, Inc.

Copyright Ex Libris Limited, 2015. All rights reserved.

Document released: November 2015

Web address: <http://www.exlibrisgroup.com>

Table of Contents

	Updates to This Guide	5
Chapter 1	Introduction	7
	Local Client Preview Server	7
	Remote OPAC Preview Server	8
	Local OPAC Preview Server	8
Chapter 2	Requirements	9
	Browser Requirements.....	9
	System Requirements.....	9
	Local Preview Server Requirements	9
	Local OPAC Preview Server Requirements	10
Chapter 3	Installing the Local Client Preview Server	11
Chapter 4	Remote OPAC Preview Server	15
Chapter 5	Local OPAC Preview Server	17
	Installing the Local OPAC Preview Server	17
	Managing the Local OPAC Preview Server.....	19
	Customizing the Local OPAC Preview Server	21
	Stopping the Local OPAC Preview Server	21
	Uninstalling the Local OPAC Preview Server.....	22
Appendix A	Changing the Default Port for Preview Server	23

Updates to This Guide

This guide includes the following changes:

- Updated references to PREVOY911 to PREVOY920
- Updates references to preview900_install and preview911_install to preview920_install
- Updated the port information in **Local Preview Server Requirements** on page 9
- Updated the port information in **Installing the Local Client Preview Server** on page 11
- Updated the port information in **Remote OPAC Preview Server** on page 15
- Updated references to VOY911 to VOY920 in **Installing the Local OPAC Preview Server** on page 17

1

Introduction

This section includes:

- **Local Client Preview Server** on page 7
- **Remote OPAC Preview Server** on page 8
- **Local OPAC Preview Server** on page 8

Preview Server is available for customers to view a preview of the new features of Voyager before upgrading to a new software release or version.

There are three types of Preview Server:

- **Local Client Preview Server**
- **Remote OPAC Preview Server**
- **Local OPAC Preview Server**

This document explains how to connect to these three options so that you can test the new features and prepare for your upgrade.

Local Client Preview Server

You can test the Voyager clients of the latest voyager release by downloading the clients from the documentation center. You are able to see all of the client feature updates and enhancements. If there is a client feature that depends on server side changes, those features are not enabled. This is to ensure that customers experience the functionality of the software without special customizations for any specific institution or workflow. Also, your changes might not remain in the Ex Libris environment for the duration of your testing. If at any point a refresh of the preview server is required, this refresh may be performed without notice.

Remote OPAC Preview Server

Using an environment that is setup and hosted by Ex Libris, you can connect your browser to an Ex Libris provided URL to preview the basic functionality of the OPAC. You cannot make any changes to the display of the OPAC and you cannot preview the OPAC's extensive feature set. With this option, you can see what changes have been made out-of-the-box for the new release. You can compare the new version of the OPAC with what is available in your installation using an unmodified skin.

Local OPAC Preview Server

If you are primarily interested in making customization changes to the OPAC in preparations for your Voyager upgrade, use the local OPAC Preview Server installation. The local preview server installation is the third component of preview server and allows you to test the OPAC in a local setting prior to the upgrade. This option gives you access to the XSL, CSS, and configuration files necessary to making changes to the look and feel of the OPAC. This feature can be valuable and reduce the stress of going through the Voyage upgrade process by making the necessary changes to the OPAC skins prior to your upgrade date. When you upgrade, you can then copy the skins from the preview server into your production environment. This feature can be particularly useful if you do not have a test server environment to receive the latest version prior to your production environment upgrade.

2

Requirements

This section describes the system requirements for installing Preview Server.

This section includes:

- **Browser Requirements** on page 9
- **System Requirements** on page 9
- **Local Preview Server Requirements** on page 9
- **Local OPAC Preview Server Requirements** on page 10

Browser Requirements

For browser requirements to use the Remote OPAC Preview Server and the Local OPAC Preview Server, refer to the *Voyager Installation and Upgrade Requirements* document.

System Requirements

Refer to the *Voyager Installation and Upgrade Requirements* document for the minimum requirements for installing the Voyager clients on your PC.

If you already have Voyager clients on your local PC, be sure to install these clients in a different location – do not overwrite your current production clients.

Local Preview Server Requirements

The *Voyager Installation and Upgrade Requirements* document contains the packages necessary to run the local OPAC and Client Preview Servers. Ensure that your system has all of the system packages for your Voyager server's operating system and that all requirements have been met.

Local OPAC Preview Server Requirements

- Outbound access to `preview1.hosted.exlibrisgroup.com` and preview server ports 9814 and 9914 must be configured on the server.
- One (1) external port (by default 7098) is required for WebVoyage and Skin Administration. Ensure that this port is available through your firewall. For information on changing the default port, see [Appendix A: Changing the Default Port for Preview Server](#) on page 23.
- Root access is not required for this installation

3

Installing the Local Client Preview Server

This section describes how to install the local client Preview Server.

To set up the local client Preview Server:

- 1 Download and install the clients from the Documentation Center. (For more information on how to download and install the Voyager clients, refer to the *Voyager Technical User's Guide*.)
- 2 Modify the `Voyager.ini` file located at `C:\PreviewVoyager` with the following information:

```
[Cataloging]
Server=preview1.hosted.exlibrisgroup.com
Port=9810
Timeout=60

[Acquisitions]
Server=preview1.hosted.exlibrisgroup.com
Port=9820
Timeout=60

[Circulation]
Server=preview1.hosted.exlibrisgroup.com
Port=9830
Timeout=60
ChargeTimeout=60

[Reports]
Server=preview1.hosted.exlibrisgroup.com
Port=9840
Timeout=60

[SysAdmin]
Server=preview1.hosted.exlibrisgroup.com
Port=9850
Timeout=60

[CallSlip]
Server=preview1.hosted.exlibrisgroup.com
Port=9880
Timeout=60
```

```
[MediaScheduling]
Server=preview1.hosted.exlibrisgroup.com
Port=9885
Timeout=60

[GlobalDataChange]
Server=preview1.hosted.exlibrisgroup.com
Port=9815
Timeout=60000

[GlobalLog]
SingleLogin=Y
Encrypt=N
ServerSortList=Y
ASCIISortList=Y
ASCIISortColumn=Y

[SearchURI]
#Name=Barn&esNoble
#URI=http://search.barnesandnoble.com
#Copy=Y
#SearchSyntax=/booksearch/results.asp?WRD=<searchtext>
#Name=WebVoyage
#URI=http://preview1.hosted.exlibrisgroup.com/
#Copy=Y
#SearchSyntax=/vwebv/
search?searchArg=<searchtext>&searchCode=TALL&limitTo=none&re
ccount=10&searchType=0
#Name=Amazon
#URI=http://www.amazon.com
#ECopy=Y
#SearchSyntax=/exec/obidos/external-
search?keyword=<searchtext>&mode=blended
#Name=Worldcat
#URI=http://www.worldcat.org/
#Copy=Y
#SearchSyntax=search?&q=
#Name=Google
#URI=http://www.google.com/
#Copy=Y
#SearchSyntax=search?&q=

[MARC POSTing]
#Classic WebVoyage
#WebVoyage="http://preview1.hosted.exlibrisgroup.com/cgi-bin/
Pbibredirect.cgi"
#Tomcat WebVoyage
WebVoyage="http://preview1.hosted.exlibrisgroup.com/vwebv/
holdingsInfo"
#Classic WebVoyage
#LinkResolver="http://preview1.hosted.exlibrisgroup.com/cgi-
bin/Phhttplinkresolver.cgi"
```

```
#Tomcat WebVoyage  
LinkResolver="http://preview1.hosted.exlibrisgroup.com/vwebv/  
linkResolver"
```

- 3 Run the clients by navigating to the directory where you installed them. (The default location is C:\PreviewVoyager\). Double-click the Voyager modules that you selected during installation.

4

Remote OPAC Preview Server

This section describes how to run the remote OPAC Preview Server.

To run the OPAC Preview Server:

- 1 Enter the following URL into the browser address bar:

```
http://preview1.hosted.exlibrisgroup.com:9808
```

- 2 Enter the following username and password when you are prompted:

```
User: preview
```

```
Pass: (See KCS Article 000040922 in Salesforce for the password.)
```

- 3 If you want to log on as a patron, enter the following barcode and last name:

```
Barcode: 2692
```

```
Last Name: Hayes
```


5

Local OPAC Preview Server

This section describes how to install, manage, and customize the local OPAC Preview Server.

This section includes:

- [Installing the Local OPAC Preview Server](#) on page 17
- [Managing the Local OPAC Preview Server](#) on page 19
- [Customizing the Local OPAC Preview Server](#) on page 21
- [Stopping the Local OPAC Preview Server](#) on page 21
- [Uninstalling the Local OPAC Preview Server](#) on page 22

Installing the Local OPAC Preview Server

This section describes how to install the local OPAC Preview Server.

To install the local OPAC Preview Server:

- 1 Download the Preview Server package.
 - For UNIX, log on to your voyager server as the voyager user:

```
mkdir -p /m1/incoming
cd /m1/incoming
ftp downloads.exlibrisgroup.com
  user: preview
  password:
cd VOY920/<OS>
bin
hash
get preview920_install
bye
```

NOTE:

Obtain the FTP password for Preview Server from the eService Knowledge Base #16384-11361.

For example:

```
/export/home/voyager $ mkdir -p /ml/incoming
/export/home/voyager $ cd /ml/incoming
/ml/incoming $ ftp downloads.exlibrisgroup.com
Connected to downloads.exlibrisgroup.com.
220-Unauthorized use is prohibited.
220-
220-All transactions are logged.
220-
220 downloads.exlibrisgroup.com FTP server (Version wu-
2.6.0(2) Fri Mar 10 08:47:43 CST 2000) ready.
Name (downloads.exlibrisgroup.com): preview
331 Password required for preview.
Password:

230 User preview logged in. Access restrictions apply.

ftp> cd VOY920/<OS>

ftp> bin
200 Type set to I.
ftp> hash
Hash mark printing on (8192 bytes/hash mark).
ftp> get preview920_install
200 PORT command successful.
.....
ftp> bye
221-Thank you for using the FTP service on
downloads.exlibrisgroup.com.
221 Goodbye.
```

2 Install the Preview Server package.

■ For UNIX:

- a** Log on to the server as the voyager user.

```
cd /ml/incoming
chmod u+x preview920_install
./preview920_install
```

- b** Enter where you want to install the package.
- c** Enter where Voyager is located.
- d** Enter Y to begin the installation.

NOTE:

You can change the port from 7098 to a different port now. For information on changing the default port, see **Appendix A: Changing the Default Port for Preview Server** on page 23.

For example:

```
#####
Welcome to the Voyager Preview Server Installer
#####

Where do you wish to install? [/m1/incoming]
Where is voyager located? [/m1/voyager]

Ready to install Preview Server for Voyager ? Y/N [Y]

Checking for required files.....OK
Checking install space.....OK
Creating Install Directory.....OK
Extracting files, please be patient..OK
Configuring Preview Directory.....OK
Creating mock xxxdb skins.....OK
```

IMPORTANT:

If there are any errors, uninstall the local OPAC Preview Server and re-execute `preview920_install.exe`. For information on uninstalling the local OPAC Preview Server, see **Uninstalling the Local OPAC Preview Server** on page 22.

Managing the Local OPAC Preview Server

This section describes how to manage the local OPAC Preview Server.

To manage the local OPAC Preview Server:

- 1 Start the Preview Server.

- For UNIX:

Log on to the server as the `voyager` user.

```
cd /m1/incoming/PREVOY920
./preview.ksh start
```

2 Test the Preview Server.

- a Open a supported browser.
- b Enter the following URL into the browser address bar:

```
http://<voyager server IP or fqdn>:7098/
```

3 Log on to the Administration area.

- a Open a browser on your PC
- b Enter the following URL into the browser address bar:

```
http://your.library.edu:7098/skins
```

- c Enter the following user name and password:

```
User name: preview
Password: preview
```

The following is displayed:

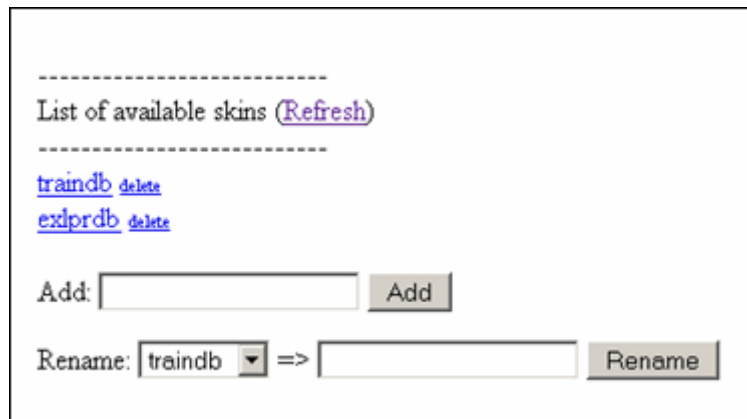


Figure 1: Skin Management

You can perform the following actions from this page:

Table 1. Skin Management

Action	Description
View Skins in the OPAC	Click the database to display the skin.
Delete Skins	Click delete next to the skin to be removed.
Add Skins	In the Add text box, enter the name of the additional skin, and click Add .
Rename Skins	Select an available skin from Rename drop-down list. Enter the new name for the skin in the text box, and click Rename .

Customizing the Local OPAC Preview Server

For instructions on how to customize the skins, see the *Voyager® 9.1.0 WebVoyage Basic User's Guide* or the *Voyager® 8.1.0 WebVoyage Architecture Overview and Configuration Models*.

IMPORTANT:

Do not make any changes to `exl_default`. This skin is not for customer use. Any customizations may be lost during upgrade.

To customize the Local OPAC Preview Server:

- For UNIX:
 - a Log on to your server as the `voyager` user.
 - b Change the directory to `ui` where the skins reside.

```
cd /m1/incoming/PREVOY920/tomcat/vwebv/context/vwebv/ui
```

- c View your created skins:

```
ls
```

For example:

```
exl_default traindb v910db
```

Stopping the Local OPAC Preview Server

This section describes how to stop the local OPAC Preview Server.

To stop the local OPAC Preview Server:

- For UNIX
Log on to your server as the `voyager` user.

```
cd /m1/incoming/PREVOY920/  
./preview.ksh stop
```

For example:

```
Stop tomcat...
Using CATALINA_BASE: /m1/incoming/PREVOY920/
tomcat/vwebv
Using CATALINA_HOME: /m1/incoming/PREVOY920/
tomcat/vwebv/catalina_home
Using CATALINA_TMPDIR: /m1/incoming/PREVOY920/
tomcat/vwebv/temp
Using JAVA_HOME: /m1/incoming/PREVOY920/
tomcat/vwebv/java
PLEASE WAIT...
Tomcat is stopping...
```

Uninstalling the Local OPAC Preview Server

This section describes how to uninstall the local OPAC Preview Server.

- For UNIX:
 - a Stop the Preview Server. See [Stopping the Local OPAC Preview Server](#) on page 21.
 - b Log on to your server as the `voyager` user

```
cd /m1/incoming
rm -rf PREVOY920
```

A

Changing the Default Port for Preview Server

This appendix describes how to change the default port for Preview Server.

To change the default port for Preview Server:

- For UNIX

- a Log on to your server as the `voyager` user:

```
cd /m1/incoming/PREVOY920
./preview.ksh stop
cd apache2/conf/ActivatedVirtualHosts
vi PREVOY_vwebv_httpd.conf
```

- b Change 7098 to <New Port>:

```
Listen 7098
<VirtualHost *:7098>
```

- c Start Preview Server:

```
cd /m1/incoming/PREVOY920
./preview.ksh start
```

